

GE 50 Package - ideal for small solutions



Renowned Commend quality & reliability at a premium value




The Customised Communication Package

At the core of this system is the compact Intercom Server GE 50 with 2 integral outputs (door release relays) to open barriers, gates or doors and an EE 401 Master Station. Using this package, you then add a mix of surface or flush mount intercom stations, further outputs and an optional telephone transfer facility to suit the solution needed. Pre-programmed before being sent out to site, these sets are ready to install.



Door opening at the touch of a button

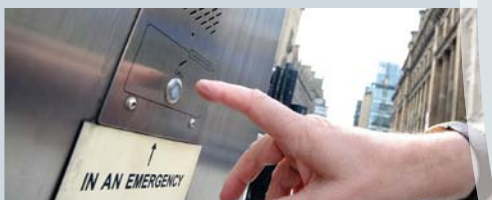

External use for emergency calls

FEATURES AND BENEFITS

- ▶ **Flexible capacity: up to 11 subscribers and up to 10 volt free outputs**
 - Master Station (reception, concierge, security office, petrol forecourt kiosks etc.)
 - Barriers / gate control
 - Robust Intercom Stations - Flush or Surface mounted
- ▶ **Optional call forwarding to PSTN or PABX**
- ▶ **Pre-configured for set numbers of stations (see overleaf)**
- ▶ **Rugged, vandal resistant stations**
- ▶ **4-wire technology using CAT 5 Cable**
- ▶ **Crystal clear speech quality**
- ▶ **Intercom Stations powered from Server up to 1km line length**
- ▶ **Renowned Commend quality**
- ▶ **24 month back to base warranty**




SECURITY AND COMMUNICATION

Communication Package

Intercom Server

Microprocessor controlled Intercom Server for up to 12 stations at one location. (11 Slaves, and one Master with two door release relays (outputs) as standard). Additional interface allows for call transfer to the Public Telephone Network (PSTN) or to a PABX. Up to 8 extra door / gate releases for access control can be added to the solution.

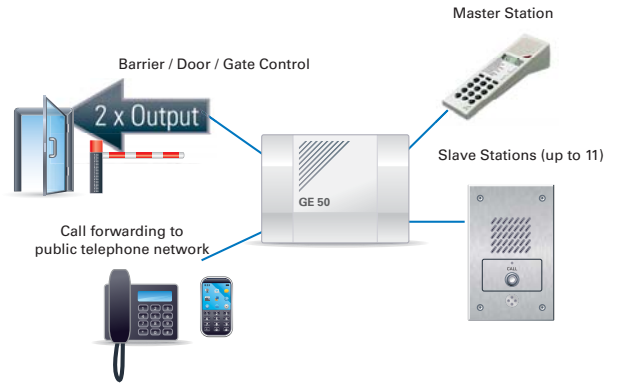

Core Package

Pre-configured for up to:

- 3 Intercom Stations plus 1 Master = **OPTION 1***
- 7 Intercom Stations plus 1 Master = **OPTION 2***
- 11 Intercom Stations plus 1 Master = **OPTION 3***

*add Intercom stations which are priced individually

GE 50 W 310 mm, H 210 mm, D 775 mm
EE 401 W 66 mm, H 55 mm D 230 mm

2.280 g
365 g



Intercom Stations

Choose between Flush or Surface mount stations, or a mixture of both.

Flush W 135 mm, H 215 mm, D 2 mm
(back box) W 105 mm, H 190 mm, D 65 mm
Surface W 135 mm, H 215 mm, D 88 mm



Extras

Optional extra door releases (Outputs) (Maximum 8 extra per GE 50):

- + 4 Door releases = **OPTION A**
- + 8 Door releases = **OPTION B**

Call Forwarding Facility to transfer a call to a mobile or land line** = **OPTION C**

NB: telephone number to be provided at time of order

(** Maximum of 4 additional Outputs only can be provided when Call Forwarding Facility is added to the system)



COMMEND UK LTD

Park House, Cambridge Road, Harlow, Essex CM20 2EU · UK
Tel. 01279 457 510 · Fax 01279 445 453

sales@commend.co.uk · www.commend.co.uk



SECURITY AND COMMUNICATION

All products in this brochure are specifically for this packaged solution and cannot be transferred to other quotations. Product info GE 50 Package Version 2 25-6-10 | This brochure provides only information of a general nature and cannot form part of a contract. Any information about systems or devices provided in this brochure is subject to technical and design changes. Images are for illustration purposes only and may be subject to variation or change without notice